Make Your Wall Smart

WS NC FOR VANTAGE EasyTouch GLASS KEYPAD - Product description:
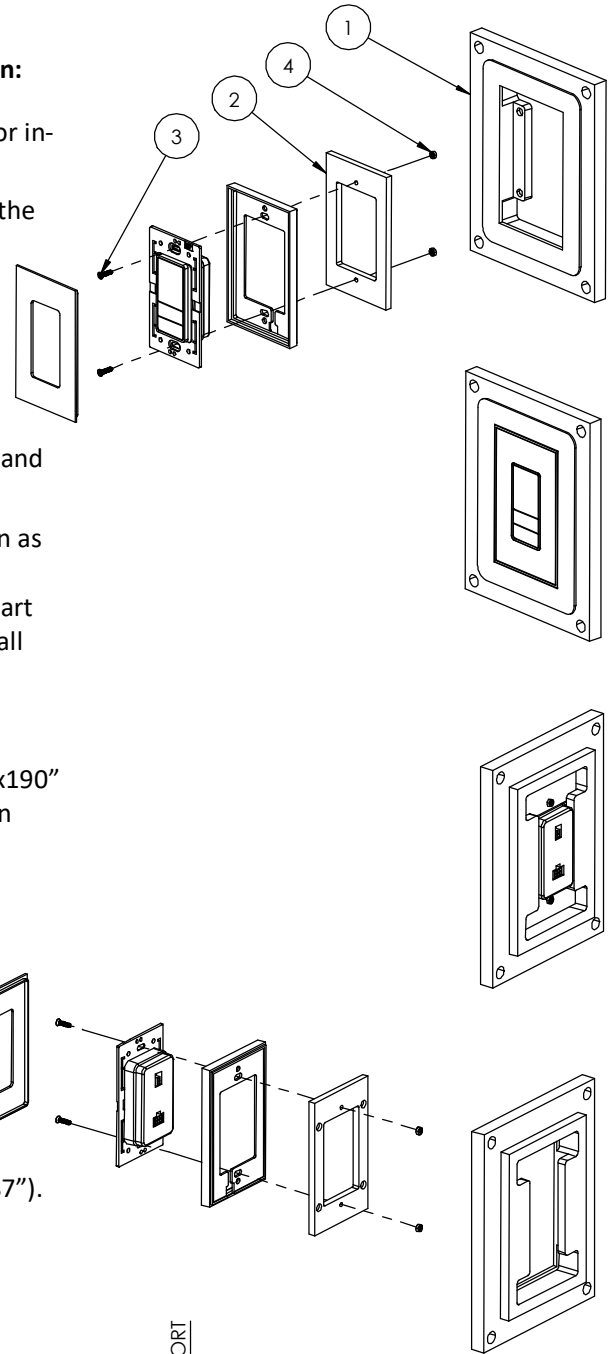
The "WS NC FOR VANTAGE EasyTouch Glass KEYPAD" is an adapter for in-wall flush installation of a VANTAGE EasyTouch Glass keypad.
The "WS NC FOR VANTAGE EasyTouch GLASS KEYPAD" firmly mounts the keypad while allowing easy access, insertion and removal.

Key features and benefits:

- Flush with the wall.

- Paintable with the wall paint in any color and texture.

- Allows easy insertion and removal of the keypad by manual push and magnet detachment of the keypad adapter.

- The adapter is supplied unpainted (To be painted after installation as part of the wall).

- Designed to be installed in ½" drywall. Installation of the Wall-Smart adapter is straight-forward. Installation process is similar to drywall construction procedures. Before installation, read Wall-Smart installation instruction 10-04-00101-INS in http://www.wall-smart.com/faq

- For installation in concrete/block wall use "WS Concrete Box 147x190" P/N 100-01-781 (sold separately) according installation instruction 10-04-00103-INS in http://www.wall-smart.com/faq

- Designed for the use with EasyTouch Glass keypad (by VANTAGE) (keypad not included).

- Adapter kit contains:
  1. (X1) Wall adapter
  2. (X1) Keypad adapter
  3. (X2) M3x12 screws
  4. (X2) M3 nuts

Key properties:

- Dimensions (W/H/D): 144.8mm (5.7")/ 188mm (7.4")/ 22mm (0.87").
- Power Supply: None (manual adapter).
- Weight: 0.4Kg, 0.88lbs.
- Material: Moisture resistant MDF (compliant with TSCA Title VI).

[0.5] 12.7 DRYWALL THICKNESS

BETWEEN DRYWALL SUPPORT

[5.67] 144

PUSH TO OPEN

[7.40] 188

[5.70] 144.8

[0.87] 22

[3.97] 100.8 BETWEEN DRYWALL SUPPORT